

List Prices - Engine Drive

"S" Self-priming centrifugal, glass reinforced polyester construction, stainless steel internal and external fasteners, EPDM O-rings and check valve, with polyethylene shaft sleeve. See bulletin PF-1400 for accessories and options.



Pacer Pumps feature engines by Briggs & Stratton and Honda.

Curve*	Port Size	Eng	Ship Wt.	Model Number	Price Code	List Price
P	1½"	127cc B&S	40#	SE1½PL E550	58-11P4 E550	\$530.
P	2"	127cc B&S	40#	SE2PL E550	58-12P4 E550	530.
Y	2"	127cc B&S	40#	SE2YL E550	58-12Y4 E550	530.
P	2"	205cc B&S	46#	SE2PL E950	58-12P4 E950	600.
U	2"	205cc B&S	46#	SE2UL E950	58-12U4 E950	600.
U	2"	6.5 Vanguard	57#	SE2UL E6VCP	58-12U4 E6VCP	755.
U	2"	5.0 Honda GC	47#	SE2UL E5HOC	58-12U4 E5HOC	792.
U	2"	5.5 Honda GX	48#	SE2UL E5HCP	58-12U4 E5HCP	1076.
R	2"	205cc B&S	46#	SE2RL E950	58-12R4 E950	600.
S	3"	6.5 Vanguard	57#	SE3SL E6VCP	58-13S4 E6VCP	825.
X	3"	8.0 Vanguard	70#	SE3XL E8VCP	58-13X4 E8VCP	1320.
Z	3"	8.0 Vanguard	70#	SE3ZL E8VCP	58-13Z4 E8VCP	1320.

"I" Self-priming centrifugal pump with stainless steel housing and separating clamp. Glass reinforced Ryton®, polyester or polypropylene internal parts, stainless steel wetted internal fasteners. Pump has EPDM O-rings and check valve, standard engine with heat shrinkable polyethylene shaft sleeve. Roll cage is standard. See bulletin PF-1425 for accessories and options.



PUMP WITH STAINLESS STEEL HOUSING AND POLYESTER INTERNAL PARTS:

W	1½"/2"	127cc B&S	64#	ISE2WL E550	58-52W4 E550	\$1144.
W	1½"/2"	205cc B&S	71#	ISE2WL E950	58-52W4 E950	1214.

PUMP WITH STAINLESS STEEL HOUSING AND POLYPROPYLENE INTERNAL PARTS:

W	1½"/2"	127cc B&S	64#	ISP2WL E550	58-62W4 E550	\$1165.
W	1½"/2"	205cc B&S	71#	ISP2WL E950	58-62W4 E950	1235.

"T" Self-priming centrifugal, glass reinforced polyester housing, non-metallic impeller, volute and wearplate coating, stainless steel housing clamp and internal fasteners, Buna-N O-rings and check valve, oil lubricated single mechanical seal with silicon carbide faces. Excellent for soft solids, dirty water and salt water applications. See bulletin PF-1375 for accessories and options.



2"

Q	2"	6.5 Vanguard B&S	70#	TE2QBB E6VC K	58-72Q8 E6VC K	\$1645.
T	3"	8.0 Vanguard B&S	115#	TE3TBB E8VC K	58-73T8 E8VC K	2171.
T	3"	Honda GX 240	115#	TE3TBB E8HC K	58-73T8 E8HC K	3035.



3"

CURVE LETTER DESIGNATIONS, REFER TO BULLETINS PP-630, PP-631, PP-632, or PP633

All prices and specifications subject to change without notice.

List Prices - Hydraulic Drive

"S" Pumps Self-priming centrifugal, glass reinforced polyester construction, stainless steel internal and external fasteners, EPDM O-rings and check valve, 316 stainless steel shaft adapter, and pressure gauge for adjusting RPM. See Bulletin PTP-121 for hydraulic motor fluid requirements.



Curve*	Port Size	Req'd HP	Ship Wt.	Model Number	Price Code	List Price
E	1½"	2.0	16#	SE1½EL HYC	58-11E4 HYC	\$700.
F	2"	3.0	16#	SE2FL HYC	58-12F4 HYC	700.
H	2"	3.0	16#	SE2HL HYC	58-12H4 HYC	700.
I	2"	5.0	16#	SE2IL HYC	58-12I4 HYC	700.
J	2"	5.0	16#	SE2JL HYC	58-12J4 HYC	700.
L	3"	5.0	18#	SE3LL HYC	58-13L4 HYC	770.

"I" Pumps Self-priming centrifugal, with stainless steel housing, glass reinforced Ryton®, polyester or polypropylene internal parts, stainless steel housing clamp & internal fasteners, EPDM O-rings and check valve, 316 stainless steel shaft adapter, steel baseplate, and pressure gauge for adjusting RPM. See Bulletin PTP-121 for hydraulic motor fluid requirements.

WITH STAINLESS STEEL HOUSING AND GLASS REINFORCED POLYESTER INTERNAL PARTS:



G	1½"/2"	3.0	23#	ISE2GL HYC	58-52G4 HYC	\$1194.
---	--------	-----	-----	------------	-------------	---------

WITH STAINLESS STEEL HOUSING AND GLASS REINFORCED POLYPROPYLENE INTERNAL PARTS:

G	1½"/2"	3.0	23#	ISP2GL HYC	58-62G4 HYC	\$1215.
---	--------	-----	-----	------------	-------------	---------

"T" Pumps are not available driven by hydraulic motor.

List Prices - PNEUMATIC DRIVE ***

"S" Pumps - Same as described under "S" Pumps above with steel baseplate:



Curve*	Port Size	Req'd HP	Ship Wt.	Model Number	Price Code	List Price
E	1½"	1.0	44#	SE1½EL PNC	58-11E4 PNC	\$ 1130.
F	2"	2.1	44#	SE2FL PNC	58-12F4 PNC	1130.
H	2"	1.8	44#	SE2HL PNC	58-12H4 PNC	1130.
I	2"	3.8	44#	SE2IL PNC	58-12I4 PNC	1130.
J	2"	2.9	44#	SE2JL PNC	58-12J4 PNC	1130.
L	3"	2.9	46#	SE3LL PNC	58-13L4 PNC	1200.

"I" Pumps - Same as described under "I" Pumps above with steel baseplate:

WITH STAINLESS STEEL HOUSING AND GLASS REINFORCED POLYESTER INTERNAL PARTS:

G	1½"/2"	1.8	47#	ISE2GL PNC	58-52G4 PNC	\$1624.
---	--------	-----	-----	------------	-------------	---------

WITH STAINLESS STEEL HOUSING AND GLASS REINFORCED POLYPROPYLENE INTERNAL PARTS:

G	1½"/2"	1.8	47#	ISP2GL PNC	58-62G4 PNC	\$1645.
---	--------	-----	-----	------------	-------------	---------

See Bulletin PTP-110 for pneumatic motor air volume and pressure requirements.

* CURVE LETTER DESIGNATIONS REFER TO BULLETIN PTP-121.

***Pneumatic motors operate at 2900 RPM instead of 3450 RPM. Therefore, the noted performance curves must be adjusted downward as follows: Reduce flow by 20%; reduce head by 29%.

All prices F.O.B. Lancaster, PA
Manufactured by:

PACER® PUMPS

Div. of ASM Industries, Inc.
41 Industrial Circle
Lancaster, PA USA 17601-5927
Email:sales@pacerpumps.com
www.pacerpumps.com

717-656-2161
800-233-3861
FAX:717-656-0477

List Prices -Electric Drive

"S" Pumps Self-priming centrifugal, glass reinforced polyester construction, stainless steel internal and external fasteners, EPDM O-rings and check valve, 316 stainless steel shaft adapter, polypropylene baseplate. See Bulletin PF-1400 for accessories and options.



Curve*	Port Size	Mtr HP	Max.Spec. Gravity	Price Model Number	Code	List Price
SINGLE PHASE, 115/230 VOLT, TEFC						
A	1½"	.5	1.0	SE1½AL G.5C	58-11A4 G.5C	\$788.
C	1½"	1.0	1.0	SE1½CL G1.0C	58-11C4 G1.0C	960.
E	2"	2	1.17	SE2EL C2.0C	58-12E4 C2.0C	1060.
H	2"	3	1.0	SE2HL C3.0C	58-12H4 C3.0C	1430.
J	2"	5	1.0	SE2JL C5.0C (230V)	58-12J4 C5.0C	1730.
L	3"	5	1.0	SE3LL C5.0C (230V)	58-13L4 C5.0C	1800.
THREE PHASE, 230/460 VOLT, TEFC						
A	1½"	.5	1.0	SE1½AL H.5C	58-11A4 H.5C	\$760.
C	1½"	1.0	1.0	SE1½CL H1.0C	58-11C4 H1.0C	810.
E	2"	2	1.17	SE2EL D2.0C	58-12E4 D2.0C	905.
H	2"	3	1.0	SE2HL D3.0C	58-12H4 D3.0C	985.
J	2"	5	1.0	SE2JL D5.0C	58-12J4 D5.0C	1430.
L	3"	5	1.0	SE3LL D5.0C	58-13L4 D5.0C	1500.

Curves A & C are 1750 RPM; all others are 3450 RPM.
50Hz & explosion proof motors are readily available . . . consult factory or dealer.

"I" Pumps Self-priming centrifugal, with stainless steel housing, glass reinforced Rytan®, polyester or polypropylene internal parts, stainless steel housing clamp & internal fasteners. Pump has EPDM O-rings and check valve, 316 stainless steel shaft adapter, polypropylene baseplate. See Bulletin PF-1425 for accessories and options.



SINGLE PHASE 230 VOLT, TEFC, 3450 RPM WITH STAINLESS STEEL HOUSING AND POLYESTER OR POLYPROPYLENE INTERNAL PARTS:						
G	1½"/2"	3	1.0	ISE2GL C3.0C (polyester)	58-52G4 C3.0C	\$1924.
G	1½"/2"	3	1.0	ISP2GL C3.0C (polypro)	58-62G4 C3.0C	\$1945.
THREE PHASE 230/460V, TEFC 3450 RPM WITH STAINLESS STEEL HOUSING AND POLYESTER OR POLYPROPYLENE INTERNAL PARTS:						
G	1½"/2"	3	1.0	ISE2GL D3.0C (polyester)	58-52G4 D3.0C	\$1479.
G	1½"/2"	3	1.0	ISP2GL D3.0C (polypro)	58-62G4 D3.0C	\$1500.

50Hz & explosion proof motors are readily available...consult factory or dealer.

"T" Pumps are not available close-coupled to electric motors. See other side for "T" pedestal pumps for flexible coupling to electric motors through 10 horsepower.

BASEPLATE KITS FOR FLEXIBLE COUPLING pedestal pumps to motors. All kits include coupling guard, shims, screws, nuts, washers, and steel baseplate. (See other side for pedestal pumps.) Flexible coupled pumps are available from the factory completely assembled. Consult factory for prices



Pump Series	Use on Curves	Price Code	List Price
S	A,C,E,F,H,P,R,S,U,Y	58-0028	\$ 250.
	I,J,L	58-0016	340.
I	G,W	58-0109	185.
	T - 2"	B,K	58-0116
T - 3"	D,M	58-0117	680.

*CURVE LETTER DESIGNATIONS, REFER TO BULLETIN PP-630, PP-631 OR PP-632

All prices and specifications subject to change without notice.

List Prices - Pedestal Mount

"S" Pumps Self-priming centrifugal, glass reinforced polyester construction, stainless steel internal and external fasteners, EPDM O-rings and check valve, 3/4" diameter carbon steel shaft protected with polyethylene sleeve, plastic pedestal. Fully assembled & ready to couple to motor or other drive.



Curve*	Port Size	Req'd HP	RPM	Ship Wt.	Model Number	Price Code	List Price
A	1½"	.5	1750	13#	SE1½AL PE	58-11A4 B	\$338.
C	1½"	1.0	1750	13#	SE1½CL PE	58-11C4 B	338.
E	2"	2.0	3450	13#	SE2EL PE	58-12E4 B	338.
F	2"	5.0	3450	13#	SE2FL PE	58-12F4 B	338.
H	2"	3.0	3450	13#	SE2HL PE	58-12H4 B	338.
I	2"	7.5	3450	13#	SE2IL PE	58-12I4 B	338.
J	2"	5.0	3450	13#	SE2JL PE	58-12J4 B	338.
L	3"	5.0	3450	15#	SE3LL PE	58-13L4 B	408.

Same as above, **WITH CAST IRON PEDESTAL AND SOLID 316 STAINLESS STEEL SHAFT.**



A	1½"	.5	1750	24#	SE1½AL CSS	58-11A4 P	\$498.
C	1½"	1.0	1750	24#	SE1½CL CSS	58-11C4 P	498.
E	2"	2.0	3450	24#	SE2EL CSS	58-12E4 P	498.
F	2"	5.0	3450	24#	SE2FL CSS	58-12F4 P	498.
H	2"	3.0	3450	24#	SE2HL CSS	58-12H4 P	498.
I	2"	7.5	3450	24#	SE2IL CSS	58-12I4 P	498.
J	2"	5.0	3450	24#	SE2JL CSS	58-12J4 P	498.
L	3"	5.0	3450	26#	SE3LL CSS	58-13L4 P	568.

"I" Pumps Self-priming centrifugal, with stainless steel housing, glass reinforced Ryton®, polyester or polypropylene internal parts, stainless steel housing clamp & internal fasteners, EPDM O-rings and check valve, cast iron pedestal with solid 3/4" diameter 316 stainless steel shaft.

PUMP WITH STAINLESS STEEL HOUSING AND POLYESTER INTERNAL PARTS:



G	1½"/2"	3	3450	27#	ISE2GL CSS	58-52G4 P	\$992.
---	--------	---	------	-----	------------	-----------	--------

Same, WITH GLASS REINFORCED POLYPROPYLENE INTERNAL PARTS:

G	1½"/2"	3	3450	27#	ISP2GL CSS	58-62G4 P	\$1013.
---	--------	---	------	-----	------------	-----------	---------

"T" Pumps Self-priming centrifugal, glass reinforced polyester housing, non-metallic impeller, volute and wearplate coating, stainless steel housing clamp and internal fasteners, Buna-N O-rings and check valve, oil lubricated single mechanical seal with hard silicon carbide faces, cast iron pedestal with solid stainless steel shaft. 2" pump has 3/4" shaft. 3" pump has 1-1/8" shaft. (EPDM elastomers not available on these pumps.)



B	2"	.75	1750	37#	TE2BBB CSS	58-72B8 P	\$968.
K	2"	5.0	3450	37#	TE2KBB CSS	58-72K8 P	968.
D	3"	1.0	1750	56#	TE3DBB CTSS	58-73D8 P3	1294.
M	3"	7.5	3450	56#	TE3MBB CTSS	58-73M8 P3	1294.

* **CURVE LETTER DESIGNATIONS REFER TO BULLETIN PP-630, PP-631 OR PP-632.**
See front for **baseplate kits to long couple pumps to motors.**

All prices F.O.B. Lancaster, PA
Manufactured by:


PACER® PUMPS

Div. of ASM Industries, Inc.

41 Industrial Circle 717-656-2161
Lancaster, PA USA 17601-5927 800-233-3861
Email:sales@pacerpumps.com FAX: 717-656-0477
www.pacerpumps.com

List Prices -Engine Drive

End suction centrifugal, glass reinforced polyester construction, stainless steel internal and external fasteners, EPDM O-rings, standard engine*, shaft protected with polyethylene sleeve. See Bulletin PF-1450 for accessories and options. Note: Roll cage is standard equipment. Consult factory for **Polypropylene, Noryl** or **Ryton** construction.

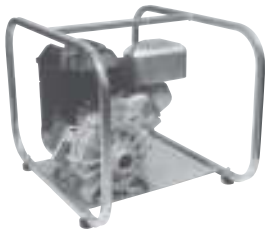

Curve*	Port Size	Eng HP	Ship Wt.	Model Number	Price Code	List Price
C	1½"/2"	127cc	37#	PCE2CL E550	60-12C4 E4CP	\$617.
D	1½"/2"	127cc	37#	PCE2DL E550	60-12D4 E4CP	617.
E	1½"/2"	205cc	43#	PCE2EL E950	60-12E4 E5ICP	687.
F	3"	6.5 hp	44#	PCE3FL E6VCP	60-13F4 E6VCP	912.

* Standard engine is Briggs & Stratton (see power ratings above)

List Prices -Pedestal Mounted

Pump end same as above, mounted to plastic pedestal with ¾" diameter carbon steel shaft protected with polyethylene sleeve.



Curve*	Port Size	Req'd HP**	Ship Wt.	Model Number	Price Code	List Price
A	1½"/2"	.5	9#	PCE2AL PE	60-12A4 B	\$305.
B	1½"/2"	1.0	9#	PCE2BL PE	60-12B4 B	305.
C	1½"/2"	2.0	9#	PCE2CL PE	60-12C4 B	305.
D	1½"/2"	3.0	9#	PCE2DL PE	60-12D4 B	305.
E	1½"/2"	5.0	9#	PCE2EL PE	60-12E4 B	305.
F	3"	5.0	10#	PCE3FL PE	60-13F4 B	375.

Same as above, **WITH CAST IRON PEDESTAL AND SOLID ¾" DIAMETER 316 STAINLESS STEEL SHAFT.**



A	1½"/2"	.5	20#	PCE2AL CSS	60-12A4 P	\$465.
B	1½"/2"	1.0	20#	PCE2BL CSS	60-12B4 P	465.
C	1½"/2"	2.0	20#	PCE2CL CSS	60-12C4 P	465.
D	1½"/2"	3.0	20#	PCE2DL CSS	60-12D4 P	465.
E	1½"/2"	5.0	20#	PCE2EL CSS	60-12E4 P	465.
F	3"	5.0	21#	PCE3FL CSS	60-13F4 P	535.

Curves A & B are 1750 RPM; C, D, E, & F are 3450 RPM.

BASEPLATE KITS FOR FLEXIBLE COUPLING pedestal pumps to motors. All kits include coupling guard, shims, screws, nuts, washers, and baseplate. Flexible coupled pumps are available from the factory completely assembled. Consult factory for prices.



Curves	Price Code No.	Price
A,B,C,D	58-0028	\$250.
E, F	58-0016	\$340.

*CURVE LETTER DESIGNATIONS, REFER TO BULLETIN PP-107

**For water. Increase HP for heavier liquids.

All prices and specifications subject to change without notice.

List Prices - Hydraulic Drive

Same pump end as described on side 1, close-coupled to a hydraulic motor with a 316 stainless steel shaft adapter, and pressure gauge for adjusting RPM. See Bulletin PTP-121 for hydraulic fluid requirements.



Curve*	Port Size	Req'd HP**	Ship Wt.	Model Number	Price Code	List Price
C	1½"/2"	2.0	12#	PCE2CL HYC	60-12C4 HYC	\$667.
D	1½"/2"	3.0	12#	PCE2DL HYC	60-12D4 HYC	667.
E	1½"/2"	5.0	12#	PCE2EL HYC	60-12E4 HYC	667.
F	3"	5.0	13#	PCE3FL HYC	60-13F4 HYC	737.

List Prices - Pneumatic Drive

Same pump end as described on side 1, close-coupled to pneumatic motor with a 316 stainless steel shaft adapter, steel baseplate.



Curve*	Port Size	HP	Ship Wt.	Model Number	Price Code	List Price
C	1½"/2"	1.1	36#	PCE2CL PNC	60-12C4 PNC	\$1097.
D	1½"/2"	1.8	36#	PCE2DL PNC	60-12D4 PNC	1097.
E	1½"/2"	2.8	36#	PCE2EL PNC	60-12E4 PNC	1097.
F	3"	2.9	37#	PCE3FL PNC	60-13F4 PNC	1167.

NOTE: Because these motors operate at 2900 RPM instead of 3450 RPM, the performance curves noted must be adjusted as follows: Reduce flow by 20%, reduce head by 29%. See Bulletin PTP-110 for air requirements.

List Prices - Electric Drive ***

Same pump end as described on side 1, close-coupled to an electric motor with 316 stainless steel shaft adapter, polypropylene baseplate.



Curve*	Port Size	Mtr Max. HP	Spec. Gravity	Price Model Number	Code	List Price
SINGLE PHASE, 115/230 VOLT, TEFC						
A	1½"/2"	.5	1.0	PCE2AL G.5C	60-12A4 G.5C	\$755.
B	1½"/2"	1.0	1.0	PCE2BL G1.0C	60-12B4 G1.0C	927.
C	1½"/2"	2.0	1.0	PCE2CL C2.0C	60-12C4 C2.0C	1027.
D	1½"/2"	3.0	1.0	PCE2DL C3.0C	60-12D4 C3.0C	1397.
F	3"	5.0	1.0	PCE3FL C5.0C (230V)	60-13F4 C5.0C	1767.
THREE PHASE, 230/460 VOLT, TEFC						
A	1½"/2"	.5	1.0	PCE2AL H.5C	60-12A4 H.5C	\$727.
B	1½"/2"	1.0	1.0	PCE2BL H1.0C	60-12B4 H1.0C	777.
C	1½"/2"	2.0	1.0	PCE2CL D2.0C	60-12C4 D2.0C	872.
D	1½"/2"	3.0	1.0	PCE2DL D3.0C	60-12D4 D3.0C	952.
F	3"	5.0	1.0	PCE3FL D5.0C	60-13F4 D5.0C	1467.

Curves A & B are 1750 RPM; C, D and F are 3450 RPM.

50 Hz & explosion proof motors are readily available . . . consult factory or dealer.

* CURVE LETTER DESIGNATIONS REFER TO BULLETIN OR PP-107.

All prices F.O.B. Lancaster, PA
Manufactured by:

PACER® PUMPS

Div. of ASM Industries, Inc.
41 Industrial Circle
Lancaster, PA USA 17601-5927
Email:sales@pacerpumps.com
www.pacerpumps.com

717-656-2161
800-233-3861
FAX: 717-656-0477

**"G" Pumps for Agriculture & Applications Requiring EPDM Elastomers
Electric & Pneumatic Drives, Pedestal Mount**

List Prices -Electric Drive (close-coupled)

Self-priming centrifugal, glass reinforced **Noryl** construction, stainless steel internal and external fasteners, EPDM O-rings, integral Noryl shaft sleeve, dual 1½" female and 2" male threaded suction and discharge connections, built-in polypropylene basket strainer, close-coupled to an electric motor, mounted on polypropylene baseplate. **Ryton pump end and special components for non metallic solution contact available.** Contact factory for quote.

Curve*	Port Size	Max. Spec. Price			Code	List Price
		HP	Gravity	Model Number		
SINGLE PHASE, 115/230 VOLT, 3450 RPM, TEFC						
A	1½"/2"	.5	1.0	GNOK1½/2AL C.5C	60-61A4 C.5C	\$883.
B	1½"/2"	.75	1.0	GNOK1½/2BL C.75C	60-61B4 C.75C	988.
C	1½"/2"	1.0	1.0	GNOK1½/2CL C1.0C	60-61C4 C1.0C	1055.
D	1½"/2"	1.5	1.0	GNOK1½/2DL C1.5C	60-61D4 C1.5C	1133.
E	1½"/2"	2.0	1.0	GNOK1½/2EL C2.0C	60-61E4 C2.0C	1155.
THREE PHASE, 230/460 VOLT, 3450 RPM, TEFC						
A	1½"/2"	.5	1.0	GNOK1½/2AL D.5C	60-61A4 D.5C	\$855.
B	1½"/2"	.75	1.0	GNOK1½/2BL D.75C	60-61B4 D.75C	865.
C	1½"/2"	1.0	1.0	GNOK1½/2CL D1.0C	60-61C4 D1.0C	905.
D	1½"/2"	1.5	1.0	GNOK1½/2DL D1.5C	60-61D4 D1.5C	955.
E	1½"/2"	2.0	1.0	GNOK1½/2EL D2.0C	60-61E4 D2.0C	1000.



50 Hz & explosion proof motors are readily available . . . consult factory or dealer.

List Prices - Pneumatic Drive - (close-coupled)

Pump end same as described above, close-coupled to a pneumatic motor mounted on a steel baseplate. See Bulletin PTP-110 for air requirements.

Curve*	Port Size	Req'd HP	Ship Wt.	Model Number	Price Code	List Price
B	1½"/2"	.45	44#	GNOK1½/2BL PNC	60-61B4 PNC	1225.
C	1½"/2"	.6	44#	GNOK1½/2CL PNC	60-61C4 PNC	1225.
D	1½"/2"	.9	44#	GNOK1½/2DL PNC	60-61D4 PNC	1225.



NOTE: Because these motors operate at 2900 RPM instead of 3450 RPM, the performance curves noted must be adjusted as follows: Reduce flow by 20%, reduce head by 29%.

***CURVE LETTER DESIGNATIONS, REFER TO BULLETIN PP-613.**

All prices and specifications subject to change without notice.

List Prices - Pedestal Mounted

Pump end same as described on Page 1, mounted to cast iron pedestal with 3/4" diameter solid 316 stainless steel shaft and serviceable ball bearings. Baseplate must be ordered separately.



Curve*	Port Size	Req'd HP**	Ship Wt.	Model Number	Price Code	List Price
A	1 1/2"/2"	.5	24#	GNOK1 1/2/2AL CSS	60-61A4 P	\$593.
B	1 1/2"/2"	.75	24#	GNOK1 1/2/2BL CSS	60-61B4 P	593.
C	1 1/2"/2"	1.0	24#	GNOK1 1/2/2CL CSS	60-61C4 P	593.
D	1 1/2"/2"	1.5	24#	GNOK1 1/2/2DL CSS	60-61D4 P	593.
E	1 1/2"/2"	2.0	24#	GNOK1 1/2/2EL CSS	60-61E4 P	593.

* Curves are 3450 RPM

** For water. Increase HP for heavier liquids.


Baseplate kit, for flexible coupling, unassembled (without a motor and pump), order Price Code 58-0028 for \$250.00.



Flexible coupled pumps are available from the factory completely assembled.
Consult factory for prices



Series 'S' flexible coupled

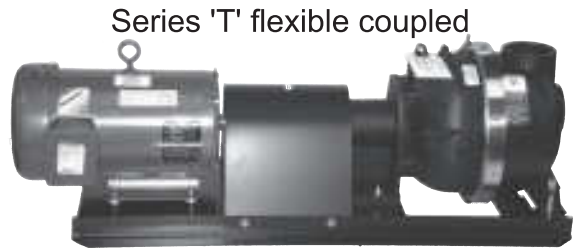

Series 'T' flexible coupled



Series 'G' flexible coupled

Most Pacer Pumps can be flexible coupled.

Pump series which may be flexible coupled are series 'A', 'S', 'G', 'I', 'PC' and 'T'.

All prices F.O.B. Lancaster, PA
Manufactured by:

PACER® PUMPS

Div. of ASM Industries, Inc.
41 Industrial Circle
Lancaster, PA USA 17601-5927
Email: sales@pacerpumps.com
www.pacerpumps.com

717-656-2161
800-233-3861
FAX: 717-656-0477

S, I, T Pumps for General Service with Fresh or Salt Water and Applications suitable for BUNA-N Elastomers
Construction, Rental, Marine, Mining, Oil Fields
Engine, Hydraulic & Pneumatic Drive (close-coupled)

List Prices - Engine Drive

"S" Pumps Self-priming centrifugal, glass reinforced polyester construction, stainless steel internal and external fasteners, BUNA-N O-rings and check valve, abrasion resistant volute, with protective polyethylene shaft sleeve.



Pacer Pumps feature engines by Briggs & Stratton and Honda.

Curve*	Port Size	Eng	Ship Wt.	Model Number	Price Code	List Price
Y	1½"	127cc B&S	40#	SE1½YBL E550	58-11Y3 E550	\$ 550.
Y	2"	127cc B&S	40#	SE2YBL E550	58-12Y3 E550	550.
R	2"	205cc B&S	46#	SE2RBL E950	58-12R3 E950	620.
R	2"	Honda GX 160	48#	SE2RBL E5HCP	58-12R3 E5HCP	1096.
S	3"	6.5 Vanguard	57#	SE3SBL E6VCP	58-13S3 E6VCP	845.
Z	3"	8.0 Vanguard	70#	SE3ZBL E8VCP	58-13Z3 E8VCP	1340.

"I" Pumps Self-priming centrifugal, pump with stainless steel housing and separating clamp. Glass reinforced Ryton®, polyester or polypropylene internal parts, stainless steel wetted internal fasteners. Pump has BUNA-N o-rings and check valve, dual 1½" female and 2" male suction and discharge connections, abrasion resistant volute, Standard engine with protective heat shrinkable polyethylene shaft sleeve. See Bulletin PF-1425 for accessories and options. Roll cage is standard.

PUMP WITH STAINLESS STEEL HOUSING & POLYESTER INTERNAL PARTS:



W	1½"/2"	127cc B&S	64#	ISE2WBL E550	58-52W3 E550	\$1164.
W	1½"/2"	205cc B&S	71#	ISE2WBL E950	58-52W3 E950	1234.

PUMP WITH STAINLESS STEEL HOUSING & POLYPROPYLENE INTERNAL PARTS:

W	1½"/2"	127cc B&S	64#	ISP2WBL E550	58-62W3 E550	\$1185.
W	1½"/2"	205cc B&S	71#	ISP2WBL E950	58-62W3 E950	1255.

"T" Self-priming centrifugal, glass reinforced polyester housing, non-metallic impeller, volute and wearplate with Urethane coating, stainless steel housing clamp and internal fasteners, Buna-N O-rings and check valve, oil lubricated single mechanical seal with silicon carbide faces. See bulletin PF-1375 for accessories and options.



Q	2"	6.5 Vanguard B&S	70#	TE2QBB E6VC K	58-72Q8 E6VC K	\$ 1645.
T	3"	8.0 Vanguard B&S	115#	TE3TBB E8VC K	58-73T8 E8VC K	2171.
T	3"	8.0 Honda GX 240	153#	TE3TBB E8HC K	58-73T8 E8HC K	3035.

***CURVE LETTER DESIGNATIONS. REFER TO BULLETIN PP-630, PP-631 OR PP-632**

List Prices - Hydraulic Drive

"S" Pumps Self-priming centrifugal, glass reinforced polyester construction, stainless steel internal and external fasteners, BUNA-N O-rings, check valve, abrasion resistant volute, stainless steel shaft adapter, and pressure gauge for adjusting RPM. See Bulletin PTP-121 for hydraulic motor fluid requirements.



Curve*	Port Size	Req'd HP	Ship Wt.	Model Number	Price Code	List Price
E	1½"	2.0	16#	SE1½EBL HYC	58-11E3 HYC	\$720.
F	2"	3.0	16#	SE2FBL HYC	58-12F3 HYC	720.
H	2"	3.0	16#	SE2HBL HYC	58-12H3 HYC	720.
I	2"	5.0	16#	SE2IBL HYC	58-12I3 HYC	720.
J	2"	5.0	16#	SE2JBL HYC	58-12J3 HYC	720.
L	3"	5.0	18#	SE3LBL HYC	58-13L3 HYC	790.

"I" Pumps Self-priming centrifugal, with stainless steel housing and separating clamp. Glass reinforced Ryton®, polyester or polypropylene internal parts. Stainless steel internal fasteners, BUNA-N O-rings, check valve, and abrasion resistant volute, 316 stainless steel shaft adapter, steel baseplate, and pressure gauge for adjusting RPM. See Bulletin PTP-121 for hydraulic motor fluid requirements.



PUMP WITH STAINLESS STEEL HOUSING AND POLYESTER INTERNAL PARTS.

G	1½"/2"	3.0	23#	ISE2GBL HYC	58-52G3 HYC	\$1214.
---	--------	-----	-----	-------------	-------------	---------

PUMP WITH STAINLESS STEEL HOUSING AND POLYPROPYLENE INTERNAL PARTS.

G	1½"/2"	3.0	23#	ISP2GBL HYC	58-62G3 HYC	\$1235.
---	--------	-----	-----	-------------	-------------	---------

"T" Pumps are not available driven by hydraulic motor.

List Prices - PNEUMATIC DRIVE ***

"S" Pumps - Same as described under "S" Pumps above, but with pneumatic motor mounted on steel baseplate:



Curve*	Port Size	Req'd HP	Ship Wt.	Model Number	Price Code	List Price
E	1½"	1.0	44#	SE1½EBL PNC	58-11E3 PNC	\$1150.
F	2"	2.1	44#	SE2FBL PNC	58-12F3 PNC	1150.
H	2"	1.8	44#	SE2HBL PNC	58-12H3 PNC	1150.
I	2"	3.8	44#	SE2IBL PNC	58-12I3 PNC	1150.
J	2"	2.9	44#	SE2JBL PNC	58-12J3 PNC	1150.
L	3"	2.9	46#	SE3LBL PNC	58-13L3 PNC	1220.

"I" Pumps **WITH STAINLESS STEEL HOUSING AND GLASS REINFORCED POLYESTER INTERNAL PARTS.**



G	1½"/2"	1.8	47#	ISE2GBL PNC	58-52G3 PNC	\$1644.
---	--------	-----	-----	-------------	-------------	---------

WITH STAINLESS STEEL HOUSING AND GLASS REINFORCED POLYPROPYLENE INTERNAL PARTS.

G	1½"/2"	1.8	47#	ISP2GBL PNC	58-62G3 PNC	\$1665.
---	--------	-----	-----	-------------	-------------	---------

See Bulletin PTP-110 for pneumatic motor air volume and pressure requirements.

"T" Pumps are not available close-coupled to pneumatic motor.

* **CURVE LETTER DESIGNATIONS REFER TO BULLETIN PP-630, PP-631 OR PP-632**

***Pneumatic motors operate at 2900 RPM instead of 3450 RPM. Therefore, the noted performance curves must be adjusted downward as follows: Reduce flow by 20%; reduce head by 29%.

All prices F.O.B. Lancaster, PA
Manufactured by:

PACER® PUMPS

Div. of ASM Industries, Inc.
41 Industrial Circle 717-656-2161
Lancaster, PA USA 17601-5927 800-233-3861
Email:sales@pacerpumps.com FAX: 717-656-0477
www.pacerpumps.com

List Prices -Electric Drive - (close-coupled)

"S"
Pumps

Self-priming centrifugal, glass reinforced polyester construction, 316 stainless steel internal and external fasteners, BUNA-N O-rings and check valve, abrasion resistant volute, stainless steel shaft adapter, polypropylene baseplate. See Bulletin PF-1400 for accessories and options.



Curve*	Port Size	Mtr HP	Max. Gravity	Spec. Model Number	Code	List Price
SINGLE PHASE, 115/230 VOLT, TEFC						
A	1½"	.5	1.0	SE1½ABL G.5C	58-11A3 G.5C	\$ 808.
C	1½"	1.0	1.0	SE1½CBL G1.0C	58-11C3 G1.0C	980.
E	2"	2.0	1.17	SE2EBL C2.0C	58-12E3 C2.0C	1080.
H	2"	3.0	1.0	SE2HBL C3.0C	58-12H3 C3.0C	1450.
J	2"	5.0	1.0	SE2JBL C5.0C (230V)	58-12J3 C5.0C	1750.
L	3"	5.0	1.0	SE3LBL C5.0C (230V)	58-13L3 C5.0C	1820.
THREE PHASE, 230/460 VOLT, TEFC						
A	1½"	.5	1.0	SE1½ABL H.5C	58-11A3 H.5C	\$ 780.
C	1½"	1.0	1.0	SE1½CBL H1.0C	58-11C3 H1.0C	830.
E	2"	2.0	1.17	SE2EBL D2.0C	58-12E3 D2.0C	925.
H	2"	3.0	1.0	SE2HBL D3.0C	58-12H3 D3.0C	1005.
J	2"	5.0	1.0	SE2JBL D5.0C	58-12J3 D5.0C	1450.
L	3"	5.0	1.0	SE3LBL D5.0C	58-13L3 D5.0C	1520.

Curves A & C are 1750 RPM; All others are 3450 RPM.

50 Hz & explosion proof motors are readily available . . . consult factory or dealer.

"I"
Pumps

Self-priming centrifugal, stainless steel housing, and separating clamp. Glass reinforced Ryton®, polyester or polypropylene internal parts, stainless steel internal fasteners, BUNA-N O-rings and check valve, abrasion resistant volute, stainless steel shaft adapter, polypropylene baseplate. See Bulletin PF-1425 for accessories and options.



SINGLE PHASE 230 VOLT, TEFC, 3450 RPM WITH STAINLESS STEEL HOUSING AND POLYESTER OR POLYPROPYLENE INTERNAL PARTS:

G	1½"/2"	3	1.0	ISE2GBL C3.0C (polyester)	58-52G3 C3.0C	\$1944.
G	1½"/2"	3	1.0	ISP2GBL C3.0C (polypro)	58-62G3 C3.0C	\$1965.

THREE PHASE 230/460V, TEFC 3450 RPM WITH STAINLESS STEEL HOUSING AND POLYESTER OR POLYPROPYLENE INTERNAL PARTS:

G	1½"/2"	3	1.0	ISE2GBL D3.0C (polyester)	58-52G3 D3.0C	\$1499.
G	1½"/2"	3	1.0	ISP2GBL D3.0C (polypro)	58-62G3 D3.0C	\$1520.

50Hz & explosion proof motors are readily available...consult factory or dealer.

"T" Pumps are not available close-coupled to electric motors. See other side for "T" pumps in pedestal mount configuration for flexible coupling to motors.

BASEPLATE KITS FOR FLEXIBLE COUPLING pedestal pumps to motors. All kits include coupling guard, shims, screws, nuts, washers, and steel baseplate. See other side for "S", "I", & "T" pedestal pumps.



Pump Series	Use on Curves	Price Code	List Price
S	A,C,E,F,H,P,R,S,U,Y	58-0028	\$ 250.
	I,J,L	58-0016	340.
I	G,W	58-0109	185.
T - 2"	B,K	58-0116	580.
T - 3"	D,M	58-0117	680.

Flexible coupled pumps are available from the factory completely assembled. Consult factory for prices

All prices and specifications subject to change without notice.

List Prices - Pedestal Mount

"S"
Pumps

Self-priming centrifugal, glass reinforced polyester construction, stainless steel internal and external fasteners, BUNA-N O-rings and check valve, abrasion resistant volute, 3/4" diameter carbon steel shaft protected with polyethylene sleeve, plastic pedestal. Fully assembled & ready to couple to motor.



Curve*	Port Size	Req'd HP	RPM	Ship Wt.	Model Number	Price Code	List Price
A	1½"	.5	1750	13#	SE1½ABL PE	58-11A3 B	\$358.
C	1½"	1.0	1750	13#	SE1½CBL PE	58-11C3 B	358.
E	2"	2.0	3450	13#	SE2EBL PE	58-12E3 B	358.
F	2"	5.0	3450	13#	SE2FBL PE	58-12F3 B	358.
H	2"	3.0	3450	13#	SE2HBL PE	58-12H3 B	358.
I	2"	7.5	3450	13#	SE2IBL PE	58-12I3 B	358.
J	2"	5.0	3450	13#	SE2JBL PE	58-12J3 B	358.
L	3"	5.0	3450	15#	SE3LBL PE	58-13L3 B	428.

Same as above, **WITH CAST IRON PEDESTAL AND SOLID 316 STAINLESS STEEL SHAFT.**



A	1½"	.5	1750	24#	SE1½ABL CSS	58-11A3 P	\$518.
C	1½"	1.0	1750	24#	SE1½CBL CSS	58-11C3 P	518.
E	2"	2.0	3450	24#	SE2EBL CSS	58-12E3 P	518.
F	2"	5.0	3450	24#	SE2FBL CSS	58-12F3 P	518.
H	2"	3.0	3450	24#	SE2HBL CSS	58-12H3 P	518.
I	2"	7.5	3450	24#	SE2IBL CSS	58-12I3 P	518.
J	2"	5.0	3450	24#	SE2JBL CSS	58-12J3 P	518.
L	3"	5.0	3450	26#	SE3LBL CSS	58-13L3 P	588.

"I"
Pumps

Self-priming centrifugal, stainless steel housing and separating clamp. Glass reinforced Ryton®, polyester or polypropylene internal parts. Stainless steel internal fasteners, BUNA-N O-rings and check valve, dual 1½" female and 2" male suction and discharge connections, abrasion resistant volute, cast iron pedestal with solid 3/4" diameter 316 stainless steel shaft.



PUMP WITH S.S. HOUSING AND POLYESTER INTERNAL PARTS

G	1½"/2"	3	3450	27#	ISE2GBL CSS	58-52G3 P	\$1012.
---	--------	---	------	-----	-------------	-----------	---------

PUMP WITH S.S. HOUSING AND POLYPROPYLENE INTERNAL PARTS

G	1½"/2"	3	3450	27#	ISP2GBL CSS	58-62G3 P	\$1033.
---	--------	---	------	-----	-------------	-----------	---------

"T"
Pumps

Self-priming centrifugal, glass reinforced polyester housing, non-metallic impeller, volute and wearplate coating, stainless steel housing clamp, stainless steel internal fasteners, BUNA-N O-rings and check valve, oil lubricated single mechanical seal with hard silicon carbide faces, rugged cast iron pedestal with solid stainless steel shaft. 2" pump has 3/4" shaft. 3" pump has 1-1/8" shaft.



B	2"	.75	1750	37#	TE2BBB CSS	58-72B8 P	\$ 968.
K	2"	5.0	3450	37#	TE2KBB CSS	58-72K8 P	968.
D	3"	1.0	1750	56#	TE3DBB CTSS	58-73D8 P3	1294.
M	3"	7.5	3450	56#	TE3MBB CTSS	58-73M8 P3	1294.

* **CURVE LETTER DESIGNATIONS REFER TO BULLETIN PP-630, PP-631 OR PP-632**
See front for **baseplate kits to flexible couple pumps** to motors.


All prices F.O.B. Lancaster, PA
Manufactured by:

PACER® PUMPS

Div. of ASM Industries, Inc.
41 Industrial Circle 717-656-2161
Lancaster, PA USA 17601-5927 800-233-3861
Email:sales@pacerpumps.com FAX:717-656-0477
www.pacerpumps.com

List Prices -Engine Drive

End suction centrifugal, glass reinforced polyester construction, stainless steel internal and external fasteners, BUNA-N O-rings, abrasion resistant volute, with polyethylene shaft sleeve, standard B & S OHV engine. Roll cage is standard. See Bulletin PF-1450 for accessories and options. Consult factory for **polypropylene, Noryl®** or **Ryton®** construction and optional engine drives.



Curve*	Port Size	Eng HP	Ship Wt.	Model Number	Price Code	List Price
C	1½"/2"	127cc	56#	PCE2CBL E550	60-12C3 E550	\$637.
D	1½"/2"	127cc	56#	PCE2DBL E550	60-12D3 E550	637.
E	1½"/2"	205cc	62#	PCE2EBL E950	60-12E3 E950	707.
F	3"	6.5	70#	PCE3FBL E6VCP	60-13F3 E6VCP	932.

* Standard engine is Briggs & Stratton (see power ratings above)

List Prices -Pedestal Mounted

Pump end same as above, mounted to plastic pedestal with ¾" diameter carbon steel shaft protected with heat shrinkable polyethylene sleeve.



Curve*	Port Size	Req'd HP**	Ship Wt.	Model Number	Price Code	List Price
A	1½"/2"	.5	9#	PCE2ABL PE	60-12A3 B	\$325.
B	1½"/2"	1.0	9#	PCE2BBL PE	60-12B3 B	325.
C	1½"/2"	2.0	9#	PCE2CBL PE	60-12C3 B	325.
D	1½"/2"	3.0	9#	PCE2DBL PE	60-12D3 B	325.
E	1½"/2"	5.0	9#	PCE2EBL PE	60-12E3 B	325.
F	3"	5.0	10#	PCE3FBL PE	60-13F3 B	395.

Same as above, **WITH HEAVY DUTY CAST IRON PEDESTAL AND SOLID ¾" DIAMETER 316 STAINLESS STEEL SHAFT (no sleeve).**



A	1½"/2"	.5	20#	PCE2ABL CSS	60-12A3 P	\$485.
B	1½"/2"	1.0	20#	PCE2BBL CSS	60-12B3 P	485.
C	1½"/2"	2.0	20#	PCE2CBL CSS	60-12C3 P	485.
D	1½"/2"	3.0	20#	PCE2DBL CSS	60-12D3 P	485.
E	1½"/2"	5.0	20#	PCE2EBL CSS	60-12E3 P	485.
F	3"	5.0	21#	PCE3FBL CSS	60-13F3 P	555.

Curves A & B are 1750 RPM; C, D, E, & F are 3450 RPM.

BASEPLATE KITS FOR FLEXIBLE COUPLING pedestal pumps to motors. All kits include coupling guard, shims, screws, nuts, washers, and baseplate.

Curves	Price Code No.	List Price
A,B,C,D	58-0028	\$250.
E, F	58-0016	340.



Flexible coupled pumps are available from the factory completely assembled. Consult factory for prices.

***CURVE LETTER DESIGNATIONS, REFER TO BULLETIN PP-107**

**For water. Increase HP for heavier liquids.

All prices and specifications subject to change without notice.

List Prices - Hydraulic Drive

Same pump end as described on page 1, close-coupled to a hydraulic motor with a 316 stainless steel shaft adapter, and pressure gauge for adjusting RPM. See bulletin PTP-121 for hydraulic motor fluid requirements.



Curve*	Port Size	Req. HP	Ship Wt.	Model Number	Price Code	List Price
C	1½"/2"	2.0	12#	PCE2CBL HYC	60-12C3 HYC	\$687.
D	1½"/2"	3.0	12#	PCE2DBL HYC	60-12D3 HYC	687.
E	1½"/2"	5.0	12#	PCE2EBL HYC	60-12E3 HYC	687.
F	3"	5.0	13#	PCE3FBL HYC	60-13F3 HYC	757.

Curves are 3450 RPM.

List Prices - Pneumatic Drive

Same pump end as described on page 1, close-coupled to a pneumatic motor with a 316 stainless steel shaft adapter, mounted on steel baseplate.



Curve*	Port Size	Req'd HP	Ship Wt.	Model Number	Price Code	List Price
C	1½"/2"	1.1	36#	PCE2CBL PNC	60-12C3 PNC	\$1117.
D	1½"/2"	1.8	36#	PCE2DBL PNC	60-12D3 PNC	1117.
E	1½"/2"	2.8	36#	PCE2EBL PNC	60-12E3 PNC	1117.
F	3"	2.9	37#	PCE3FBL PNC	60-13F3 PNC	1187.

NOTE: Because these motors operate at 2900 RPM instead of 3450 RPM, the performance curves noted must be adjusted as follows: Reduce flow by 20%, reduce head by 29%.

List Prices - Electric Drive (close-coupled)

Same pump end as described on page 1, close-coupled to an electric motor with a 316 stainless steel shaft adapter, mounted on polypropylene baseplate.



Curve*	Port Size	Mtr HP	Max. Gravity	Spec.	Model Number	Price Code	List Price
SINGLE PHASE, 115/230 VOLT, TEFC							
A	1½"/2"	.5	1.0		PCE2ABL G.5C	60-12A3 G.5C	\$775.
B	1½"/2"	1.0	1.0		PCE2BBL G1.0C	60-12B3 G1.0C	957.
C	1½"/2"	2.0	1.0		PCE2CBL C2.0C	60-12C3 C2.0C	1047.
D	1½"/2"	3.0	1.0		PCE2DBL C3.0C	60-12D3 C3.0C	1417.
F	3"	5.0	1.0		PCE3FBL C5.0C	60-13F3 C5.0C	1787.
THREE PHASE, 230/460 VOLT, TEFC							
A	1½"/2"	.5	1.0		PCE2ABL H.5C	60-12A3 H.5C	\$747.
B	1½"/2"	1.0	1.0		PCE2BBL H1.0C	60-12B3 H1.0C	797.
C	1½"/2"	2.0	1.0		PCE2CBL D2.0C	60-12C3 D2.0C	892.
D	1½"/2"	3.0	1.0		PCE2DBL D3.0C	60-12D3 D3.0C	972.
F	3"	5.0	1.0		PCE3FBL D5.0C	60-13F3 D5.0C	1487.

Curves A & B are 1750 RPM; C,F & D are 3450 RPM.

50Hz & explosion proof motors are readily available . . . consult factory or dealer.

* **CURVE LETTER DESIGNATIONS REFER TO BULLETIN PP-107.**

All of the above data is based upon water. If heavier and/or more viscous liquids are to be pumped, horsepower requirements and/or performance curves must be adjusted accordingly. Consult the factory or your distributor for assistance.

All prices F.O.B. Lancaster, PA
Manufactured by:

PACER® PUMPS

Div. of ASM Industries, Inc.
41 Industrial Circle
Lancaster, PA USA 17601-5927
Email: pacer@redrose.net
www.pacerpumps.com

717-656-2161
800-233-3861
FAX: 717-656-0477

List Prices -Electric Drive (close-coupled)

Self-priming centrifugal, glass reinforced **Noryl** construction, stainless steel internal and external fasteners, BUNA-N O-rings, integral Noryl shaft sleeve, dual 1½" female and 2" male threaded suction and discharge connections, built-in polypropylene basket strainer, close-coupled to an electric motor, mounted on a molded polypropylene baseplate.



Curve*	Port Size	HP	Max.Spec Gravity	Model Number	Price Code	List Price
SINGLE PHASE, 115/230 VOLT, 3450 RPM, TEFC						
A	1½"/2"	.5	1.0	GNOK1½/2AB C.5C	60-61A2 C.5C	\$883.
B	1½"/2"	.75	1.0	GNOK1½/2BB C.75C	60-61B2 C.75C	988.
C	1½"/2"	1.0	1.0	GNOK1½/2CB C1.0C	60-61C2 C1.0C	1055.
D	1½"/2"	1.5	1.0	GNOK1½/2DB C1.5C	60-61D2 C1.5C	1133.
E	1½"/2"	2.0	1.0	GNOK1½/2EB C2.0C	60-61E2 C2.0C	1155.
THREE PHASE, 230/460 VOLT, 3450 RPM, TEFC						
A	1½"/2"	.5	1.0	GNOK1½/2AB D.5C	60-61A2 D.5C	\$855.
B	1½"/2"	.75	1.0	GNOK1½/2BB D.75C	60-61B2 D.75C	865.
C	1½"/2"	1.0	1.0	GNOK1½/2CB D1.0C	60-61C2 D1.0C	905.
D	1½"/2"	1.5	1.0	GNOK1½/2DB D1.5C	60-61D2 D1.5C	955.
E	1½"/2"	2.0	1.0	GNOK1½/2EB D2.0C	60-61E2 D2.0C	1000.

50 Hz & explosion proof motors are readily available . . consult factory or dealer.

List Prices - Pneumatic Drive (close-coupled)

Pump end same as described above, close-coupled to a pneumatic motor mounted on a steel baseplate. See Bulletin PTP-110 for air requirements.



Curve*	Port Size	Req'd HP	Ship Wt.	Model Number	Price Code	List Price
A	1½"/2"	.3	44#	GNOK1½/2AB PNC	60-61A2 PNC	\$1225.
B	1½"/2"	.45	44#	GNOK1½/2BB PNC	60-61B2 PNC	1225.
C	1½"/2"	.6	44#	GNOK1½/2CB PNC	60-61C2 PNC	1225.
D	1½"/2"	.9	44#	GNOK1½/2DB PNC	60-61D2 PNC	1225.

NOTE: Because these motors operate at 2900 RPM instead of 3450 RPM, the performance curves noted must be adjusted as follows: Reduce flow by 20%, reduce head by 29%.

***CURVE LETTER DESIGNATIONS, REFER TO BULLETIN PP-613.**

All prices and specifications subject to change without notice.

List Prices - Pedestal Mounted

Pump end same as described on Page 1, mounted to heavy duty cast iron pedestal with 3/4" diameter solid stainless steel shaft and serviceable ball bearings. Baseplate must be ordered separately.



Curve*	Port Size	Req'd HP**	Ship Wt.	Model Number	Price Code	List Price
A	1 1/2"/2"	.5	24#	GNOK1 1/2/2AB CSS	60-61A2 P	\$593.
B	1 1/2"/2"	.75	24#	GNOK1 1/2/2BB CSS	60-61B2 P	593.
C	1 1/2"/2"	1.0	24#	GNOK1 1/2/2CB CSS	60-61C2 P	593.
D	1 1/2"/2"	1.5	24#	GNOK1 1/2/2DB CSS	60-61D2 P	593.
E	1 1/2"/2"	2.0	24#	GNOK1 1/2/2EB CSS	60-61E2 P	593.

* Curves are 3450 RPM

** For water. Increase HP for heavier liquids.

Baseplate kit, for flexible coupling, unassembled (without a motor and pump), order Price Code 58-0028 for \$250.00.



Flexible coupled pumps are available from the factory completely assembled.
Consult factory for prices



Series 'S' flexible coupled



Series 'T' flexible coupled



Series 'G' flexible coupled

Most Pacer Pumps can be flexible coupled.

Pump series which may be flexible coupled are series 'A', 'S', 'G', 'I', 'PC' and 'T'.

All prices F.O.B. Lancaster, PA
Manufactured by:

PACER® PUMPS

Div. of ASM Industries, Inc.

41 Industrial Circle
Lancaster, PA USA 17601-5927
Email: sales@pacerpumps.com
www.pacerpumps.com

717-656-2161
800-233-3861
FAX: 717-656-0477